
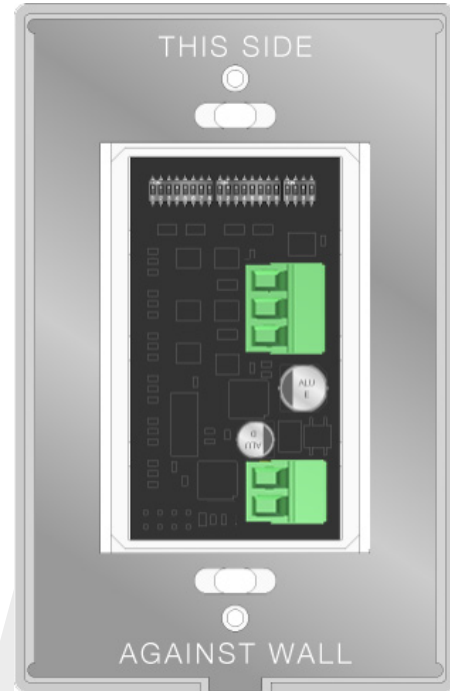


Mystique 5-Wire Smart Station

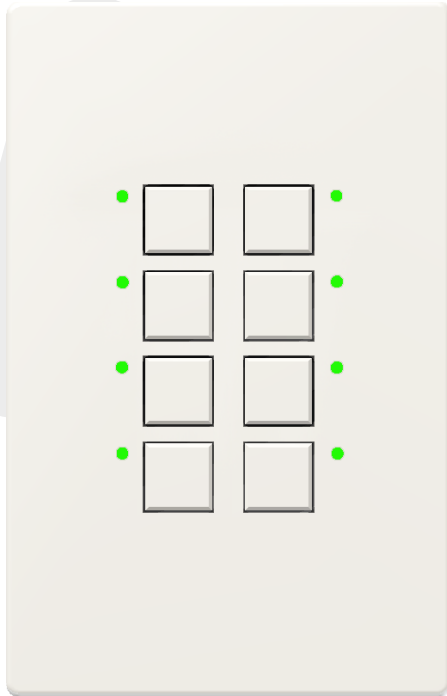

Benefits

- Elegant button design
- Ideal complement to any low voltage system
- Ideal for upgrades of existing low voltage systems

Features

- Configurable LED intensity and color
- 1 Gang configuration has a screwless cover
- Engravable button caps
- Comes as a complete unit, which includes the cover

Common Applications

- Can be used for almost any digital Touch-Plate application that requires a button for control

Specifications

Colors

- Light Almond, Black, Ivory, and White

Button Configuration

- 1, 2, 3, 4 & 8 Buttons in a 1-Gang wall mount

Run Length

- Up to 50 stations per 4000ft run
- Dependent on the Touch-Plate connection

Contact

- Dry contact

Voltage Range

- 12 - 24VAC/VDC
- Requires Class 2 Isolated Power Supply

Wire Type

- Axlink 22/01PSH+ 18/2C or equivalent

Environment

- 0 - 60°C (0 - 140°F) non-condensing atmosphere

LED Model Numbers

Part Number	Description	Dimensions
MYSS1-0101F-XXX	Mystique Station, 1 Gang, 1 Button/1 LED, 5-Wire	4.880"L x 3.125"W x .780"D
MYSS1-0202F-XXX	Mystique Station, 1 Gang, 2 Button/2 LED, 5-Wire	4.880"L x 3.125"W x .780"D
MYSS1-0303F-XXX	Mystique Station, 1 Gang, 3 Button/3 LED, 5-Wire	4.880"L x 3.125"W x .780"D
MYSS1-0404F-XXX	Mystique Station, 1 Gang, 4 Button/4 LED, 5-Wire	4.880"L x 3.125"W x .780"D
MYSS1-0808F-XXX	Mystique Station, 1 Gang, 8 Button/8 LED, 5-Wire	4.880"L x 3.125"W x .780"D
XXX Color Suffix	Colors Available: Light Almond (ALM), Black (BLK), Ivory (IVR), and White (WHT)	

Wiring Diagram

This wiring diagram does not show all the connections. Please see the Mystique Series Wiring Diagram for further wiring instructions.

