


Ultra 5-Wire Smart Station

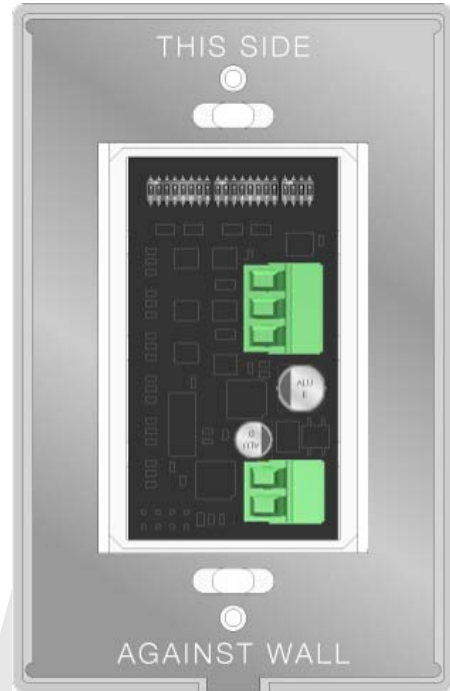

Product Features

- Configurable LED intensity and color
- Multiple station colors available
- Multiple button and LED configurations
 - 1-6 buttons per gang
 - 1-6 LEDs per gang
- 1 and 2 Gang configurations have a screwless cover
- Engravable housing
- Comes as a complete unit, which includes the cover

Common Applications

- Can be used for almost digital Touch-Plate application that requires a button for control.

Specifications

- Primary voltage is 12 - 24 VAC/VDC
- Requires Class 2 Isolated Power Supply
- Requires Axlink 22/01PSH + 18/2C or equivalent wire
- Up to 50 stations per 4000ft run; dependent on the Touch-Plate connection

LED Model Numbers

Part Number	Description	Dimensions
ULTS1-0101F-XXX	Ultra Station, 1 Gang, 1 Button/1 LED, 5-Wire	4.880"L x 3.125"W
ULTS1-0202F-XXX	Ultra Station, 1 Gang, 2 Button/2 LED, 5-Wire	4.880"L x 3.125"W
ULTS1-0303F-XXX	Ultra Station, 1 Gang, 3 Button/3 LED, 5-Wire	4.880"L x 3.125"W
ULTS1-0404F-XXX	Ultra Station, 1 Gang, 4 Button/4 LED, 5-Wire	4.880"L x 3.125"W
ULTS1-0505F-XXX	Ultra Station, 1 Gang, 5 Button/5 LED, 5-Wire	4.880"L x 3.125"W
ULTS1-0606F-XXX	Ultra Station, 1 Gang, 6 Button/6 LED, 5-Wire	4.880"L x 3.125"W
XXX Color Suffix	Colors Available: Light Almond (ALM), Black (BLK), Ivory (IVR), and White (WHT)	