


## Ultra DMX Master Station

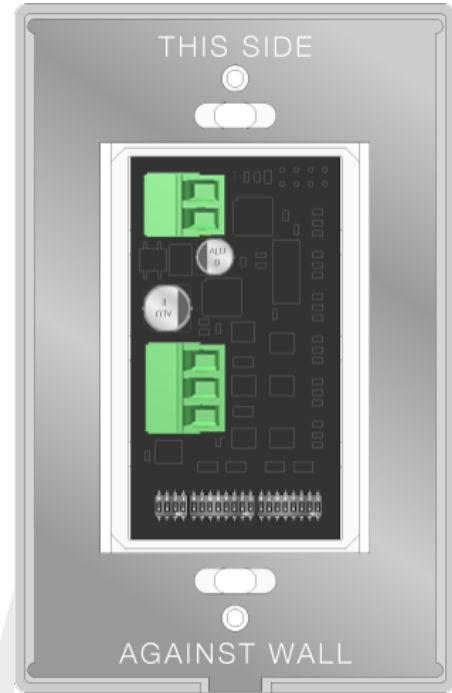

### Benefits

- Ideal for upgrades of existing low voltage systems
- Pairs well with our Solare Universal 8 channel switch/dimmer mode load controller SLR-UD-RT

### Features

- Selectable mode for each button
- Switch Mode - Relay 000 or 255. 0 or 100%
- Dimmer Mode - Dimmer 000-255. 0-100%
- Configurable LED intensity and color
- 1 Gang configuration has a screwless cover
- Engravable housing
- Comes as a complete unit, which includes the cover

### Common Applications

- Used for small office/warehouse/home installations

### Specifications

#### Colors

- Light Almond, Black, Ivory, and White

#### Button Configuration

- 1, 2, 3, 4, 5 & 6 Buttons in a decora style gangable mount

#### Run Length

- Up to 4000ft per run
- Dependent on the power connection

#### Control

- Simple 1-6 Zone DMX controller

#### Voltage Range

- 12 - 24VAC/VDC
- Requires Class 2 Isolated Power Supply

#### Wire Type

- Axlink 22/01PSH+ 18/2C or equivalent

#### Environment

- 0 - 60°C (0 - 140°F) non-condensing atmosphere



## LED Model Numbers

Part Number	Description	Dimensions
ULTS1-0101D-XXX	Ultra Station, 1 Gang, 1 Button/1 LED, DMX	4.880"L x 3.125"W
ULTS1-0202D-XXX	Ultra Station, 1 Gang, 2 Button/2 LED, DMX	4.880"L x 3.125"W
ULTS1-0303D-XXX	Ultra Station, 1 Gang, 3 Button/3 LED, DMX	4.880"L x 3.125"W
ULTS1-0404D-XXX	Ultra Station, 1 Gang, 4 Button/4 LED, DMX	4.880"L x 3.125"W
ULTS1-0606D-XXX	Ultra Station, 1 Gang, 6 Button/6 LED, DMX	4.880"L x 3.125"W
XXX Color Suffix	Colors Available: Light Almond (ALM), Black (BLK), Ivory (IVR), and White (WHT)	

